

## MTBP - 16

MTBP – TELESCOPIC Platform





### Telescopic Platform

- Working height 16 Meters
- Side reach up-to 10 Meters
- 200 kg Bucket Capacity
- Mounted on 9-ton kg GVW chassis

## STANDARD FEATURES

- ✓ Telescopic boom (3 elements: main boom + 2 telescopic extension)
- ✓ Continuous rotation 360 degrees
- ✓ Max. outreach 10 meters (200 kg)
- ✓ Electronic controls in the basket with emergency stop.
- ✓ Engine Start/Stop from control panel and basket
- ✓ Hydraulic controls from the ground, installed on turntable.
- ✓ Overload alarm
- ✓ System to automatically limit the outreach depending on the weight in the basket (M+ system)
- ✓ Ground Egress
- ✓ Ideal for street light maintenance work
- ✓ Fiberglass basket or Aluminum basket
- ✓ Safety Valves against any damage in hydraulic lines
- ✓ Actuated Warning Light System when boom is operational
- ✓ Safety at maximum load and lateral outreach
- ✓ 60° right + 60° left hydraulic rotating basket.
- ✓ Automatic basket leveling.
- ✓ Emergency manual pump.
- ✓ Internally installed electrical and hydraulic hoses

## WORKING ENVELOPE

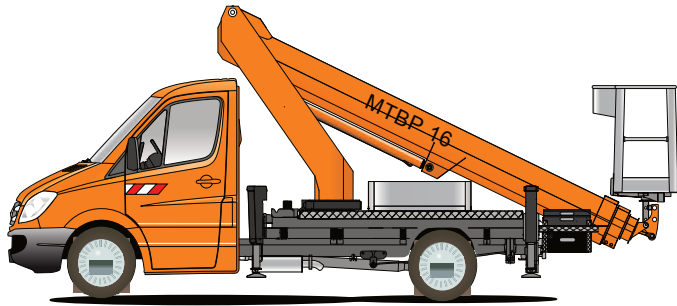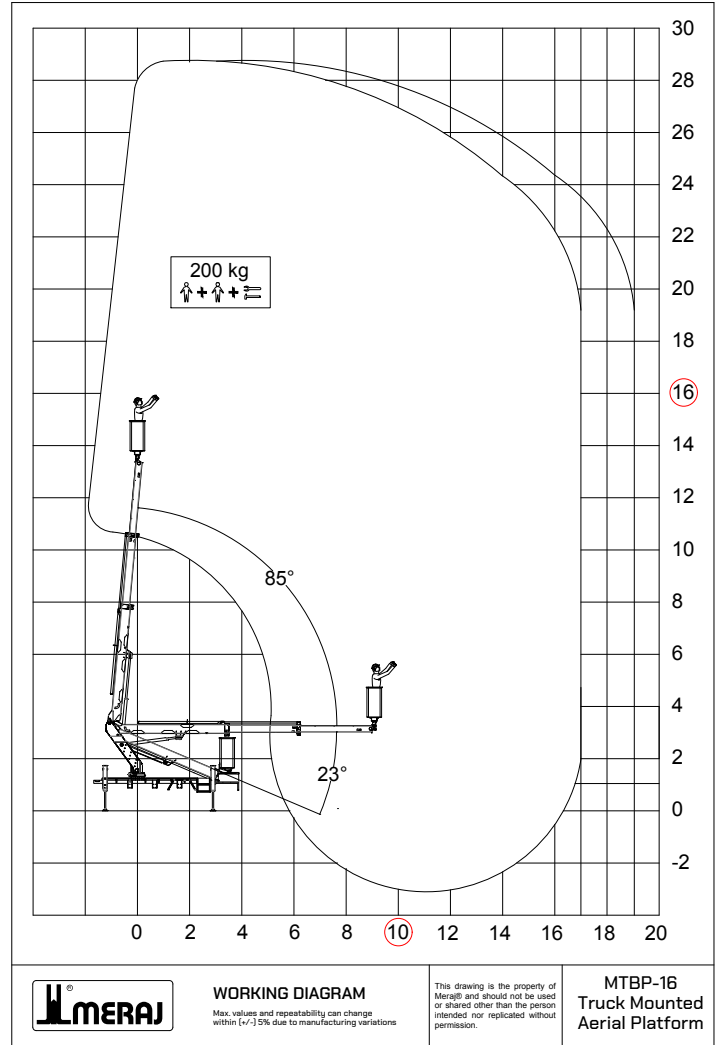

### AVAILABLE OPTIONS

- 12V or 24V electric system
- Working light in the basket
- 230V AC electric socket in the basket
- Hydraulic outlet available at basket for hydraulic tools

### Contact

#### MERAJ Türkiye

KOSBAŞ Serbest Bölgesi - Sepetlipınar SB Mah.  
107 Cad. Modüler İşyeri No. 5 İç Kapı No.  
Başiskele - Kocaeli 41090 - Türkiye

Tel: +90-262-341-4372  
Ph: +90-543-414-52-70  
E-mail: sales@meraj.com.tr

[www.meraj.com.tr](http://www.meraj.com.tr)

*Text and photos are non-binding. The photos may show extra optionals only available at extra charge. The right to change make changes in accordance with technical progress is retained.*

## PERFORMANCE

	Working height	16,00 m		Total length of vehicle	6,44 m***
	Lifting height	14,00 m		Perm. siting inclination	5°**
	Outreach	10,00 m*		Perm. total weight ≥	8.500 kg
	Size of working cage*	1,22 x 0,61 m		Range of rotation	360°
	Working cage load	200 kg		Wheelbase Carrier chassis	3,80 m

\* depending on load, angle of rotation and outfit

\*\* with restriction of performance data

\*\*\* Depending on the chassis model

Special Application Trucks & Pumps | Since 1976